


Magpower Linksys

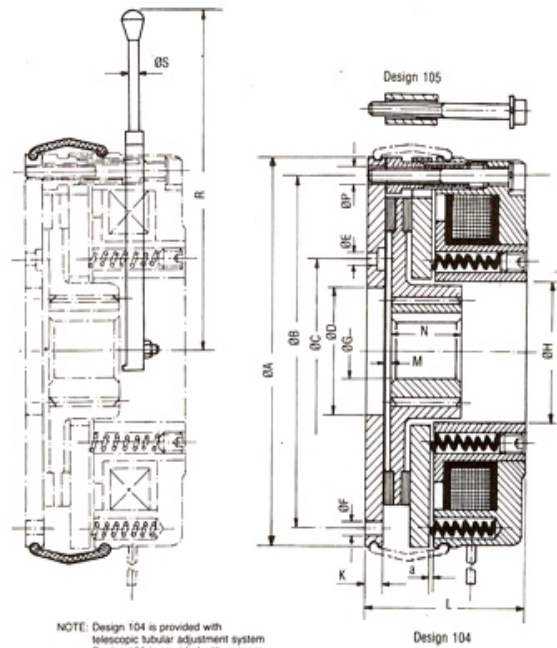

NOTE: Design 104 is provided with telescopic tubular adjustment system
Design 105 is provided with spacers.

DIMENSIONS: TYPE FSB. SPRING APPLIED FAIL SAFE BRAKE

SIZE	08	10	13	15	17	19	21	25	30
Torque (Nm)	4	8	16	32	60	80	150	240	360
Max. Speed (min ⁻¹)	3000	3000	3000	3000	3000	3000	3000	3000	3000
Input Power at 20° C(W)	20	25	30	40	50	55	65	75	100
φA	85	105	130	150	165	190	215	255	300
φB	72	90	112	132	145	170	196	230	278
φC	30	45	56	62	74	84	100	120	150
φD	20	30	40	45	55	65	75	90	120
φE	3X4.5	3X5.5	3X6.6	3X6.6	3X9	3X9	6X9	6X9	6X9
φF	3X4.5	3X5.5	3X6.6	3X6.6	3X9	3X9	6X9	6X9	6X9
φH	27	31	44	52	60	70	75	90	120
K	6	7	9	9	11	11	11	11	12.5
L	40.5	46.5	57	63.5	74.5	80.5	94	107.5	119.5
M	2.0	2.75	3.5	3	3	3	4.5	5.0	6.0
N	18	20	20	25	30	30	35	40	50
φP	3XM4	3XM5	3XM6	3XM6	3XM8	3XM8	6XM8	6XM10	6XM10
R	115	126	141	151	166	191	232	272	329
φS	10	10	10	10	12	12	14	14	16
a	0.2	0.2	0.2	0.3	0.3	0.3	0.4	0.4	0.5
Max Bore φ G ^{H2}	11	15	2p, 24*	25, 28*	30, 32*	34, 38*	42, 45*	50	65

All dimensions in mm. Alterations reserved.

Standard Bores : 11, 14, 19, 20, 24, 28, 32, 34, 38, 42, 48, 55.

*Non Standard Keyway

Standard Voltages : 24VDC, 96VDC, 190VDC. Other voltages at extra cost.

Lead Wire Length : 400mm

Note : Mounting holes φE on φC are provided only on request.

1 NM = 0.102 Kgm = 0.737 lb. ft.