


# Magpower Linksys

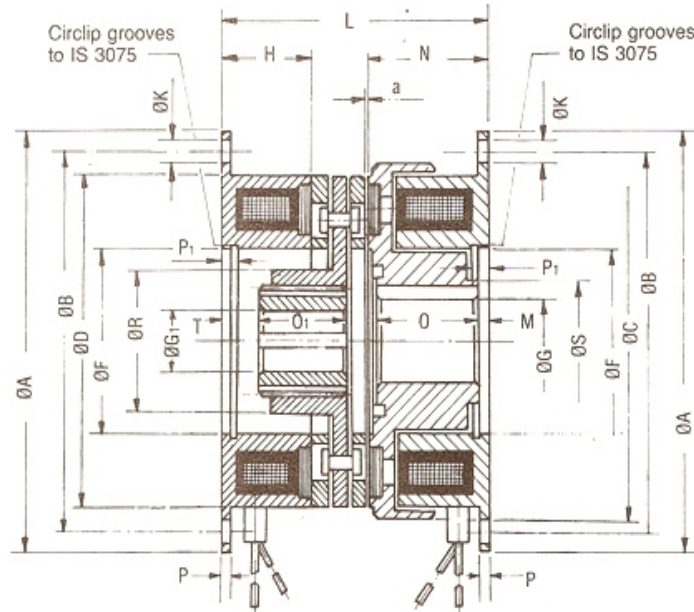

## DIMENSIONS : TYPE CBO : CLUTCH-BRAKE OPEN UNIT

SIZE	08	10	12	15	19	23	29
Torque (Nm)	6	12	25	50	100	200	400
Max. Speed (min-1)	7000	6000	5000	4000	3000	2500	2000
Input Power at 20°C(W) Clutch	15	21	29	36	50	69	86
Brake	11	16	21	27	37	46	60
φA <sub>top</sub>	80	100	125	150	190	230	290
φB	72	90	112	137	175	215	270
φC	68	85.5	107	134.5	170	214.5	266.5
φD <sub>in</sub>	63	80	100	125	160	200	250
φF <sup>18</sup>	35	42	52	62	80	100	125
H	18	20	22	24	26	30	35
K	4X4.5	4X5.5	4X6.6	4X6.6	4X9	4X9	4X11
L	51.2	57.2	65.6	73.2	83.2	97.3	116.5
M	2	2.5	3	3.5	3.5	3.9	4
N	24	26.5	30	33.5	37.5	44	51
O	20	22	24.5	27.5	31	40	47
O <sub>1</sub>	20	20	25	28	32	40	50
P	2	2.5	3	3.5	4	5	6
P <sub>1</sub>	3.5	4.3	5	5.5	6	7	8
φR	29	40	50	56	74.5	84	114
φS	23	28.5	40	45	62	77	100
T	4	7.2	6.2	6.2	7.2	7.5	8
a	0.2	0.2	0.2	0.3	0.3	0.5	0.5
Max. Bore φG <sup>17</sup>	17	22	30	40	50	65	80
Max. Bore φG <sup>17</sup>	14	20	25	30	45	50	65

All dimensions in mm. Alterations reserved.  
 Standard Bores: 11, 14, 19, 20, 24, 28, 32, 34, 38, 42, 48.  
 Standard Voltages: 24VDC, 96VDC, 190 VDC. Other voltages at extra cost.  
 Lead Wire Length: 400 mm  
 1 Nm = 0.102 Kgm = 0.737 lb.ft.