


DUAL LINE DISTRIBUTOR

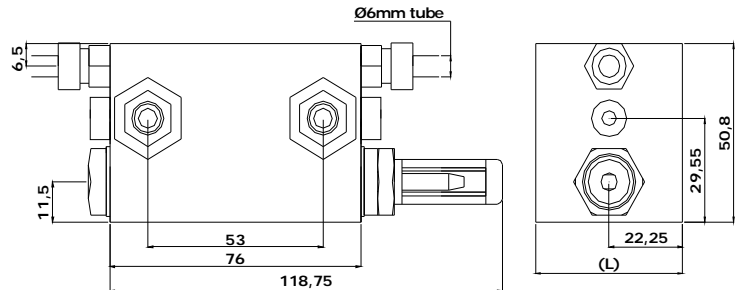

Technical Data:

Model	SVM 6502	SVM 6504	SVM 6506	SVM 6508
No of outlets	2	4	6	8
L(mm)	44.5	76	108	140

Material of Construction	Carbon Steel / Stainless Steel
Inlet Minimum Working Pressure	30 bar
Inlet Maximum Working Pressure	400 bar
Maximum Apparent Grease Viscosity	NLGI 2
Working Temperature	-30° to +80°C
Adjustable Output	0 to 5.0 ccm per stroke
Inlet Connection	3/8" BSP
Outlet Connection	Ø6mm, Ø8mm or Ø10mm tube

S.V.A Rikkon Lube Pvt.Ltd

203, Nageswara Rao Road, 2nd Extn, Athipet, Chennai- 600 058.

Tel : 91-44-262558880 / 81 Fax : 91-44-26245128

Email: sales@rikkonlube.com